



FPGWORLD.COM

# visair

## UPRIGHT 900 OPEN FRONT - TALL HEIGHT HEATED WITH 3 SHELVES

RANGE	VISAIR UPRIGHT
TEMPERATURE	HEATED
MODEL	IN-VH09-A004
FRONT	OPEN FRONT
INSTALLATION	FREESTANDING/ROLLERS
HEIGHT	1900mm
WIDTH	944mm
DEPTH	736mm

TEMPERATURE RANGE	+65°C – +85°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

## FEATURES

- High energy efficiency: 2.27 kWh per hour (average)**
- Cabinet operating temperature range +65°C - +85°C**  
**Recommended core product temperature +65°C - +80°C**
- Robust open front display, powdercoated satin black for a sleek finish

### Open Front Heated Display

- Display area starts at 734 mm (height) for easier access to hot product
- Four full-width display levels: three fixed **IWave** quartz infrared shelves and heated base
- Each **IWave** shelf is brushed stainless steel and is fitted with ticket strip to front: 30mm (height), with caution decal applied. Each shelf is supplied with 1x 837mm width removable aluminium drip trays
- Pluggable 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf

### Operational Excellence

- Easy 'plug and play' installation
- FPG **IWave** heating technology uses low-wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life
- Fitted with an electronic controller for energy efficiency
- Safer for consumers - display surfaces are maintained < +65°C and the internal air temperature is lower than in many fan-assisted cabinets
- No noise pollution – this cabinet runs silently
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with protective black buffer rail, stainless steel toe kick and rubber floor skirt at base front and sides
- Fitted with unidirectional rollers and adjustable stabilisers



Please contact FPG to discuss your requirements for meeting country-specific standards.



Showing : Visair Upright heated 900mm freestanding open front tall height cabinet with three **IWave** shelves and base

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Drip trays: Colour and woodprint options available
- Branded decals
- Custom colour
- Lockable castors
- Custom joinery solution

FPGWORLD.COM



FPGWORLD.COM

# visair

## UPRIGHT 900 OPEN FRONT - TALL HEIGHT HEATED WITH 3 SHELVES

### HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	IWAVE HEATING
IN-VH09-A004	+65°C - +85°C	+65°C - +80°C	22°C / 65% RH	Low-wattage infrared quartz elements

### ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT <sup>1</sup>	E24H <sup>2</sup> (kWh)	kWh per hour (average)	kWh per hour per m <sup>2</sup>	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG <sup>3</sup>	HOURS	LUMENS per metre	COLOUR
IN-VH09-A004	220-240 V	Single	13.1 A	54.43	2.27	1.74	3 metre 3 core cable	15 amp 3 pin plug	25,000	2758 per metre	Natural

<sup>1</sup>Current is the maximum potential current draw at 240v with +5% element tolerance.

<sup>2</sup>Nominal power consumption per 24h. i.e: 230V at 0% energy tolerance.

<sup>3</sup>Please advise country to change plug specification.


### CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION	IP RATING
IN-VH09-A004	1.30 m <sup>2</sup>	3 Shelves + Base	Open front	N/A	Stainless 304 and mild steel	IP 22


### DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VH09-A004	1900 x 944 x 736	170 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.




PLAN VIEW

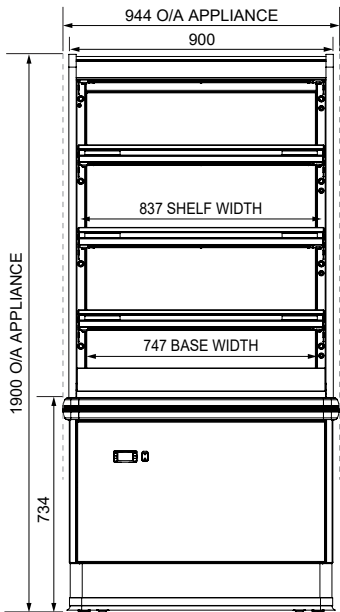

FRONT ELEVATION

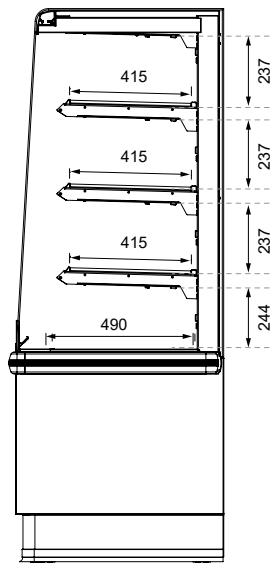

SECTION VIEW

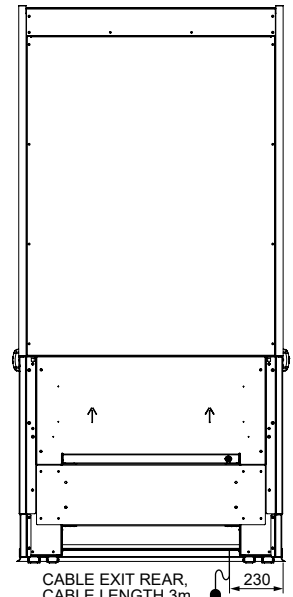

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.



Worldwide contact details: